

Prairie Wheat

Scan QR Code for
Room Scene >>>



Engineered Wood Flooring

Species:	European White Oak
Style:	Plank Flooring
Construction:	Multiply Engineered Wood
Base:	Carb 2 Eucalyptus Plywood
Length:	> 66% 86.6" < 33% Random 23.6" - 63.0"
Width:	9 1 / 2"
Thickness:	5 / 8" 4mm Sawn cut
Joint:	4-sides Tongue and Groove with micro-bevel
Surface:	Light Wire Brushed
Finish:	Germany Treffert AL2O3 Anti-scratched UV Lacquer prefinished
Grade:	Light Character
Packing:	34.10 sqft / pack

Installation:

Glue down

Nailed

Floating on concrete


Floating on underlay

Plank



*Wood may oxidated in air so color could be little vary from batch to batch while watch by people's eye.

Prairie Wheat

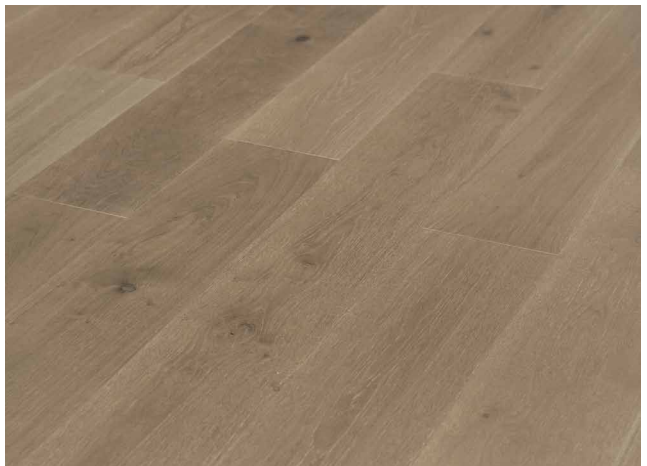

Specification



- **Real Wood Veneer**

Sawn-cut veneer in species: White Oak from sustainable forests, with full chain of custody.

- **Floor Base**

CARB 2/EPA-compliant Dynea ACIC phenolic glue plywood base.

- **Coating System**

Finished with Treffert aluminum oxide UV coating in a matte gloss, wire-brushed with natural grain texture.

- **Accurate Milling**

Precise T&G with micro bevel, crafted with German Homag technology.

- **Well Select Timber Grading**

Sorted into Select Natural, Light Character, with unique beauty of timber.

Mouldings Available

Skirting

86.6" x 3 1/4" x 5/8"



T - modling

86.6" x 4/5" x 1/2"




Quarter Round

86.6" x 2/3" x 2/3"




Stair Nosing & Treads

Bull Nose



Mitre Joint

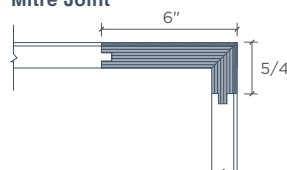

Eco-friendly Floors for Greener Living



Lifetime Structural
Integrity Limited Warranty




25 Year Residential
Surface Finish Limited Warranty




10 Year Commercial
Surface Finish Limited Warranty


Installation



Glue-Down Installation



Nail-Down Installation



Floating Installation

Fully compliant with NWFA standards.

