Sandstone Beige





Engineered Wood Flooring

Species: European White Oak
Style: Plank Flooring

Construction: Multiply Engineered Wood

Base: Carb 2 Eucalyptus Plywood

Length: > 66% 86.6" < 33% Random 23.6" - 63.0"

Width: 9 1 / 2"

Thickness: 5 / 8" 4mm Sawn cut

Joint: 4-sides Tongue and Groove with micro-bevel

Surface: Light Wire Brushed

Finish: Germany Treffert AL₂O₃ Anti-scratched UV Lacquer prefinished

Grade: Light Character
Packing: 34.10 sqft / pack

Installation:

☑ Glue down

✓ Nailed

☑ Floating on concrete

✓ Floating on underlay

Plank



*Wood may oxidated in air so color could be little vary from batch to batch while watch by people's eye.

Sandstone Beige







Specification



· Real Wood Veneer

Sawn-cut veneer in species: White Oak from sustainable forests, with full chain of custody.

Floor Base

CARB 2/EPA-compliant Dynea ACIC phenolic glue plywood base.

Coating System

Finished with Treffert aluminum oxide UV coating in a matte gloss, wire-brushed with natural grain texture.

Accurate Milling

Precise T&G with micro bevel, crafted with German Homag technology.

. Well Select Timber Grading


Sorted into Select Natural, Light Character, with unique beauty of timber.

Mouldings Avalable



Stair Nosing & Treads



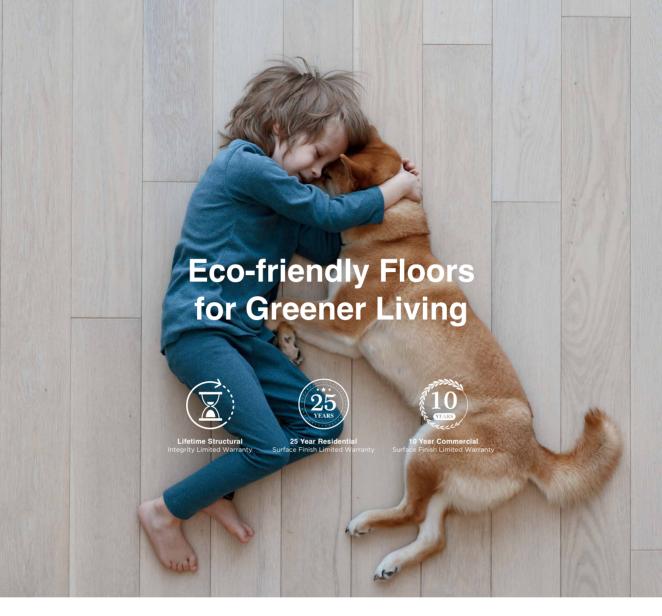


Installation







Nail-Down Installation



Floating Installation

Fully compliant with NWFA standards.











